


### Pre-set CubeWiFi parameters on the web

Press the button on the CubeWiFi for 1 second, then seeing the LED is in blue light without flashing, then use your cellphone or laptop to connect the WiFi of the CubeWiFi. (The WiFi name is as the same as the serial number of theCubeWiFi). password:12345678

A) Open the browser to login in with then IP address **192.168.10.100**

**Username: admin**

**Password: 12345678**

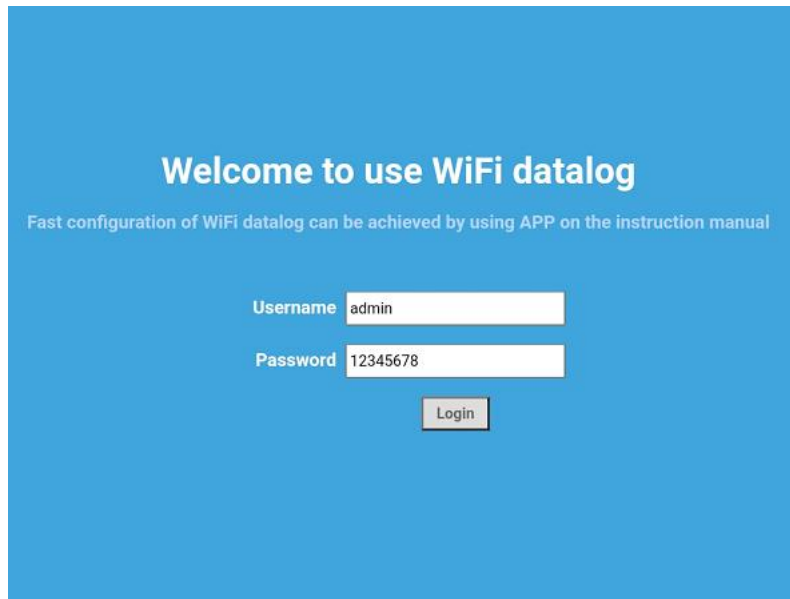


Welcome to use WiFi datalog

Fast configuration of WiFi datalog can be achieved by using APP on the instruction manual

Username

Password

B) Wireless router setting. Choose you own WLAN network. Fill in your local WLAN WiFi name and password. Press “Apply”.

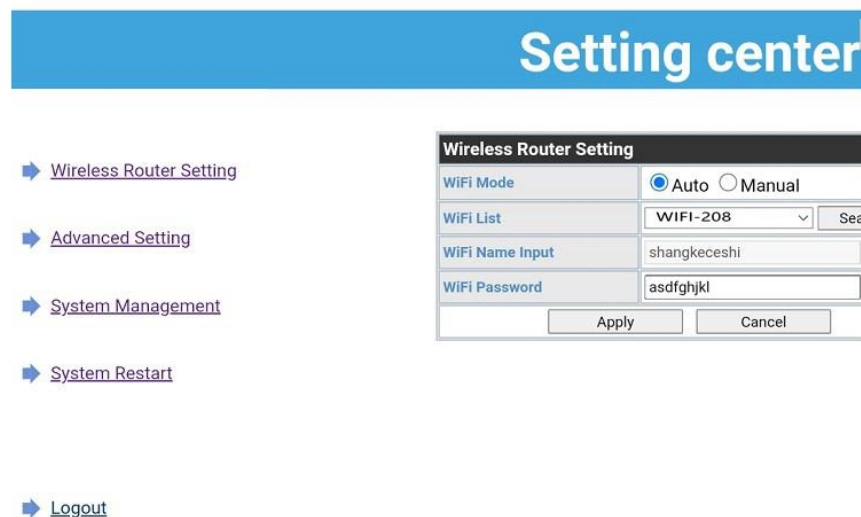

Setting center

- [Wireless Router Setting](#)
- [Advanced Setting](#)
- [System Management](#)
- [System Restart](#)
- [Logout](#)

Wireless Router Setting	
WiFi Mode	<input checked="" type="radio"/> Auto <input type="radio"/> Manual
WiFi List	WIFI-208 <input type="button" value="Sea"/>
WiFi Name Input	shangkeceshi
WiFi Password	asdfghjkl
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

C) Advanced Setting. Make sure or change the server to **server.pvbutler.com**

# Setting center

简体中文

English

- [Wireless Router Setting](#)
- [Advanced Setting](#)
- [System Management](#)
- [System Restart](#)
- [Logout](#)

Advanced Setting	
DHCP	<input checked="" type="radio"/> ON <input type="radio"/> OFF
IP Address	192.168.5.1
Default Gateway	192.168.5.1
Subnet Mask	255.255.255.0
Default Domain	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Server Domain	server.pvbutler.com Domain Connect
Server IP	IP Connect
Server Port	5279
Interval Time	5 (Min)
Inverter Time	2022-06-21 08:42:34 <input type="checkbox"/> Sync Time
Datalogger Time	2022-06-21 09:54:41 <input type="checkbox"/> Sync Time
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	

## D) Restart

# Setting center

简体中文

English

- [Wireless Router Setting](#)
- [Advanced Setting](#)
- [System Management](#)
- [System Restart](#)
- [Logout](#)

Set Successfully,Restart to use new setting.	
<input type="button" value="Restart Immediate"/>	

Warning: The users are not allow to change any other specifications without factory approval, or the WIFI could crash.